


REV	DESCRIPTION	DATE	APP
00	NEW DWG	12/12/13	D.D.

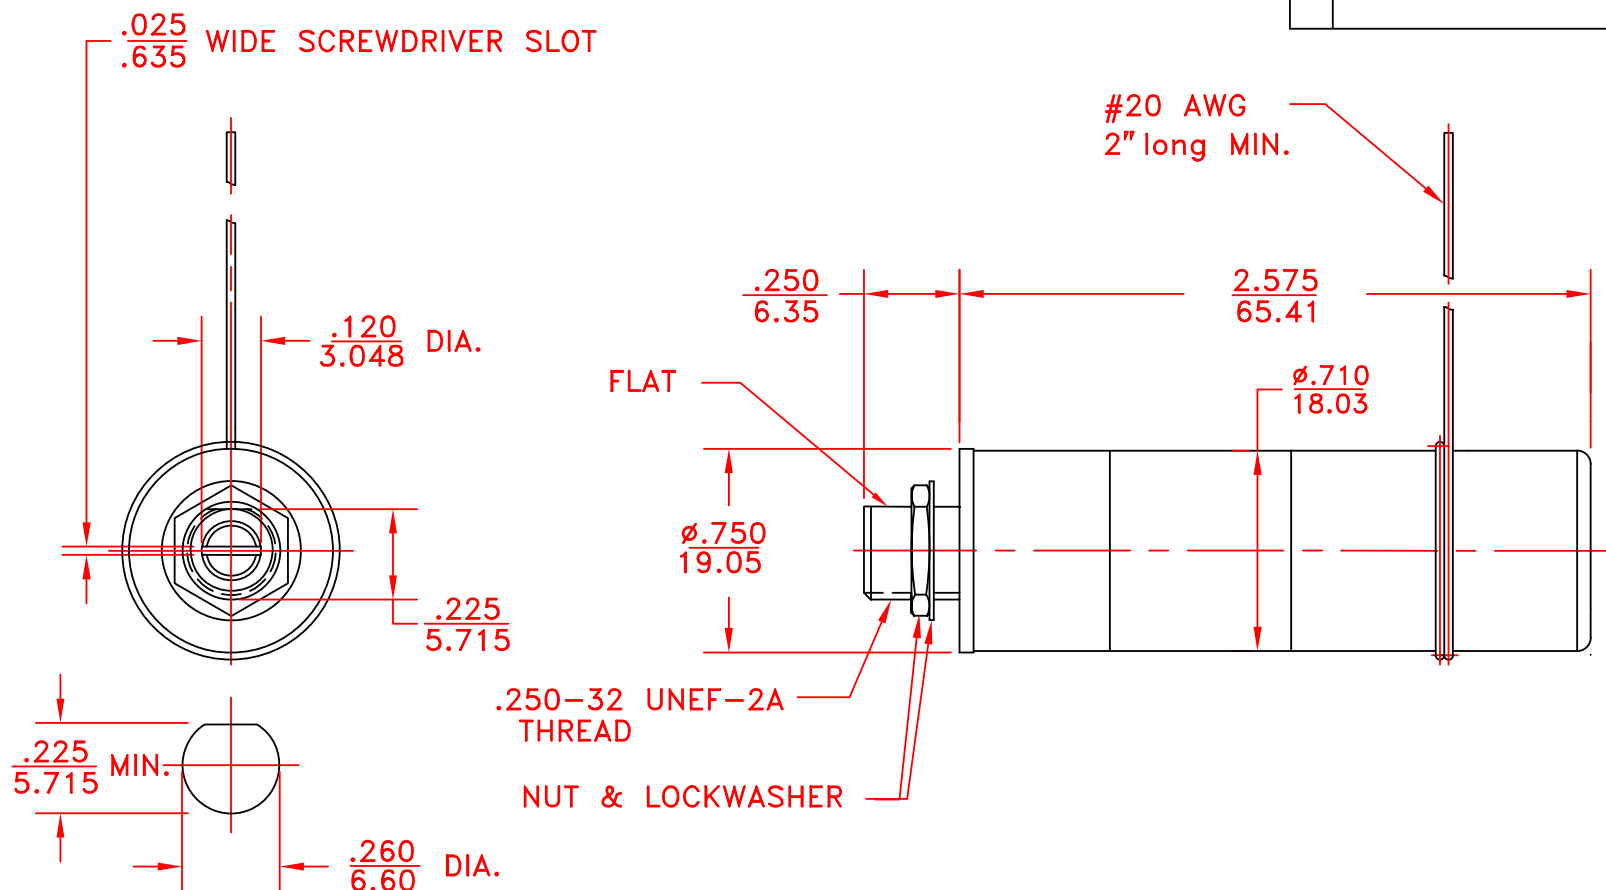

SUGGESTED PANEL MOUNT HOLE

NOTES:

1. CAPACITANCE RANGE: $C_{min} \leq 10.0$ pF, $C_{max} \geq 100$ pF.
2. WORKING VOLTAGE: 6,000 VDC.
3. WITHSTANDING VOLTAGE: 12,000 VDC.
4. $Q \geq 500$ @ 25MHZ
5. TORQUE: 0.5 TO 5.0 oz-in.
6. OPERATING TEMPERATURE: BELOW 4°K TO +125°C
7. CONSTRUCTION: 40 psi sealed, non magnetic.
8. DIMENSIONS: in/mm
9. ROTATIONAL LIFE: 10,000 TURNS

TOLERANCES: (EXCEPT AS NOTED)		SPRAGUE GOODMAN ELECTRONICS INC. 1700 SHAMES DRIVE WESTBURY, NY 11590	
DECIMAL: $\pm .005$ in $\pm .130$ mm	MATERIAL:	SCALE: NONE	DRAWN BY: R. LEVIN APPROVED: D. DITLYA
FRACTIONAL: 1/64	TITLE: OUTLINE DWG SGNMNC31006K		USED FOR:
ANGULAR: 1°	DATE: 12/12/13	DRAWING NUMBER SGNMNC31006K	REV. 00