


THERMOCOUPLE TERMINAL BLOCKS



- BUILT IN MINIATURE FEMALE THERMOCOUPLE CONNECTOR FOR MONITORING, TROUBLESHOOTING AND AUDIT FEATURE
- SCREW TYPE TERMINAL FOR SECURE AND MAINTENANCE FREE CONNECTIONS
- TYPE K AND J CALIBRATIONS
- FULLY ENCLOSED—NO END PLATES REQUIRED
- DIN RAIL MOUNTABLE (32 MM OR 35 MM)—NARROW 10.7 MM WIDTH
- IDENTIFIED WITH CALIBRATION AND “+” , “-” CONNECTIONS
- WRITE-ON TERMINAL MARKERS

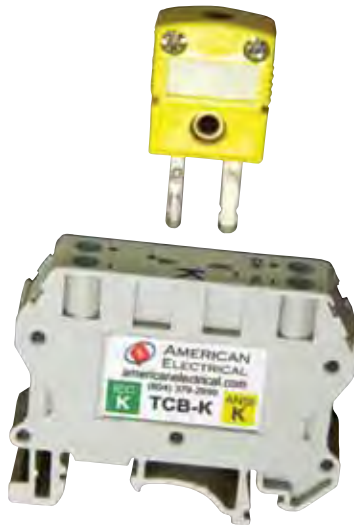

ITEM #	WIDTH	LENGTH	WIRE SIZE	INSULATION STRIPPING LENGTH	TORQUE	TEMPERATURE RANGE
TCB-J	10.7 MM	51 MM	12 AWG	8 MM	0.6 TO 0.8 N·M	-40 TO 85 °C
TCB-K	10.7 MM	51 MM	12 AWG	8 MM	0.6 TO 0.8 N·M	-40 TO 85 °C
TCABLE-J	N/A	60 IN	N/A	N/A	N/A	N/A
TCABLE-K	N/A	60 IN	N/A	N/A	N/A	N/A
TCONN-J	N/A	N/A	N/A	N/A	N/A	N/A
TCONN-K	N/A	N/A	N/A	N/A	N/A	N/A